

# Electric Actuator Size 4 COMPACT


## T6A4

**Screw Type: ACME**

**Mounting: Female Clevis  
Spherical Rod End**

**Male Rod End**

**Rear Eye**

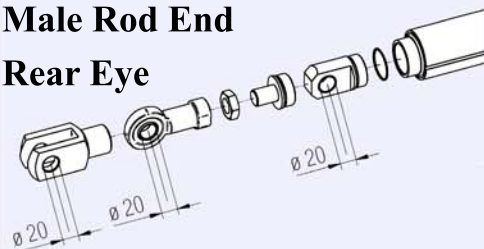

**Lubrication: For Life**

**Protection Rating: IP54**

**Power Transfer: Direct Drive**

**Motor: 460V AC**

**60 Hz, 3 Phase**

**Thermal Switch**

**Optional Brake**

**Options: Limit Switch**

**EPS02, EPS06**

**Proximity Switches**

**Position Control**

**Thrust Control**

**Trunnion Brackets**



### Compact Size 4 Selection Chart

#### ACME Screw

Actuator Type	Nominal Force	Nominal Actuator Speed	Stroke Range		Run Torque	Start-up Torque	Nominal Motor Size	Pol	Motor Current	Stall Torque
	lb.f.	inch/sec.	min. inch	max. inch	@Nominal Force	@Nominal Force			@ Load/460V	
T6A4	1100	2.4	3.9	23.6	6.66	8.32	0.90	8	2.59	14.17
T6A4	1100	2.8	3.9	23.6	6.66	8.32	0.90	6	3.01	12.43
T6A4	1100	4.7	3.9	23.6	6.66	8.32	1.30	4	3.39	13.03
T6A4	675	4.7	3.9	23.6	4.00	4.99	0.90	4	2.33	8.19

#### Standard Stroke, Increments in inches

Stroke	3.9"	7.9"	11.8"	15.7"	19.7"	23.6"
a3	9.45"	13.39"	17.32"	21.26"	25.20"	29.13"

